

CLAMP SADDLES



Hidroten clamp saddles provide a fast and reliable solution for creating branch connections on PVC and PE pipeline systems.

The **extensive range** includes models with reinforced female threaded outlets, particularly suitable for use with metal threaded fittings. **Double outlet** and reinforced double outlet versions are also available, allowing two branch connections to be made with a single service saddle while reducing the number of installation components.

This manual provides the instructions required for correct installation and removal.



www.hidroten.es

comercial@hidroten.es

export@hidroten.es


marketing@hidroten.es

ASSEMBLY / DISASSEMBLY

Before installing the service saddle, place the O-ring in the corresponding groove, as shown in steps A and B.




1. Use the saddle outlet as a drilling template to **mark the hole diameter and drill** the pipe.

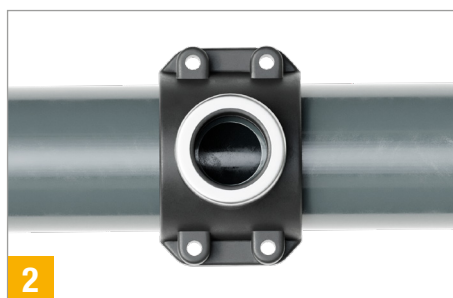

2. Position the saddle outlet centrally over the drilled hole.



3. Fit the lower half of the saddle, ensuring both halves align correctly.

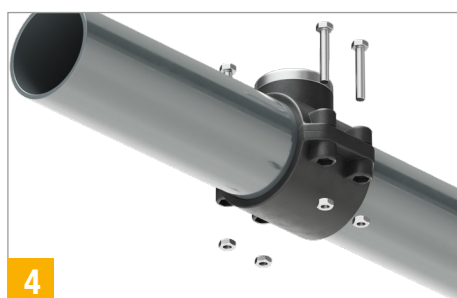

4. Fit the nuts first to facilitate bolt engagement.



5. Tighten the bolts gradually and alternately until uniform tightening is achieved.



6. Fully tighten the bolts to securely fasten the service saddle.