


RUBBER RING ADAPTOR

Slide System

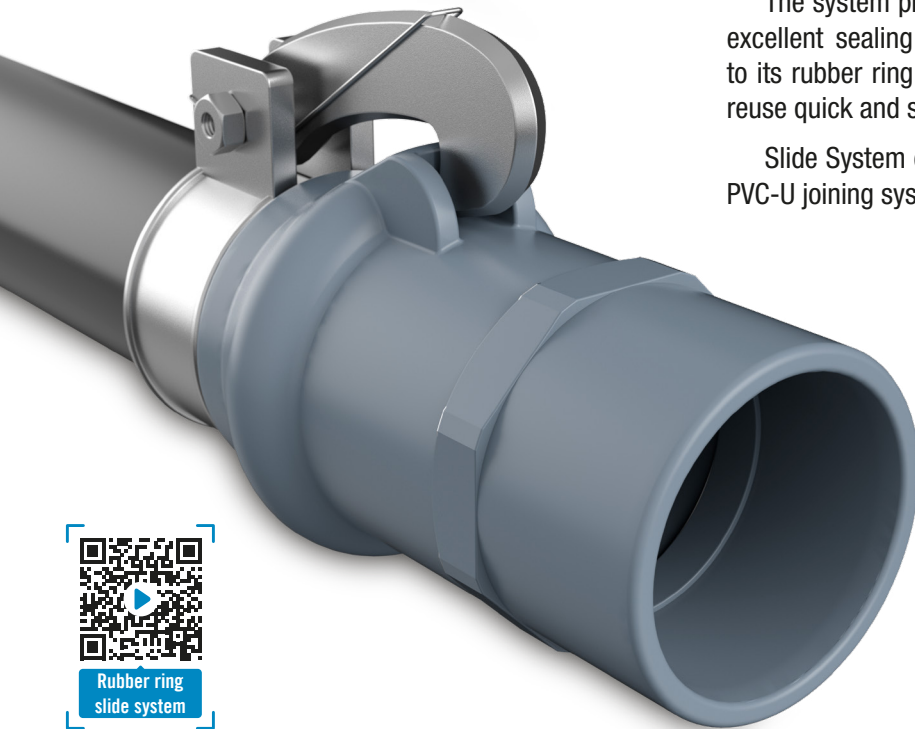

The **SLIDE SYSTEM** fitting range extends Hidroten's PVC-U solutions with a **rubber ring connection** system.

The system provides **fast, simple and secure installation**, delivering excellent sealing performance and speeding up commissioning thanks to its rubber ring connection. It also makes disassembly and component reuse quick and straightforward whenever required.


Slide System offers a faster, more versatile alternative to conventional PVC-U joining systems.



S.A.T.C.
Servicio Atención Técnica Comercial
Tlf. (+34) 966 105 888

www.hidroten.es
comercial@hidroten.es
export@hidroten.es
marketing@hidroten.es


ASSEMBLY INSTRUCTIONS

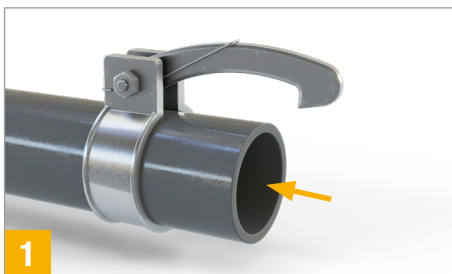


1. Place the fixing clamp on the pipe, previously cleaned to avoid damaging the rubber ring during installation.




2. Lubricate the rubber ring to facilitate assembly and prevent damage to the seal.

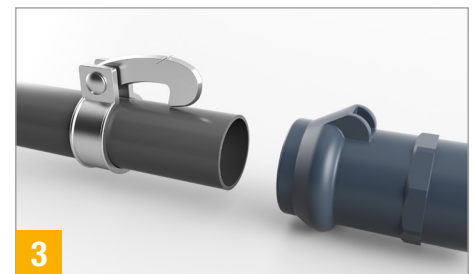


3. Position and carefully insert the pipe, avoiding pinching the rubber ring

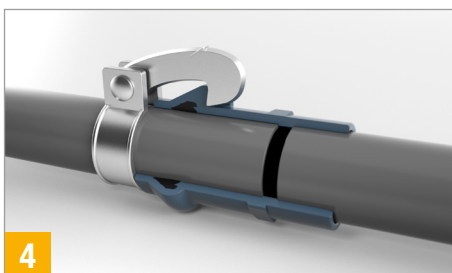

4. Insert the pipe up to the stop, ensuring the tightness of the joint.

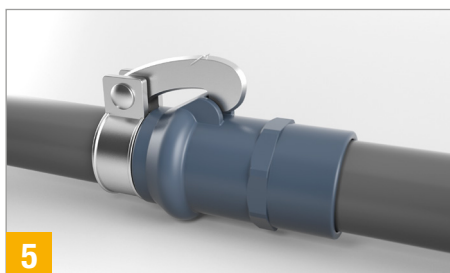

5. Close the clamp by engaging the hook into the SLIDE sleeve housing until it locks into place.

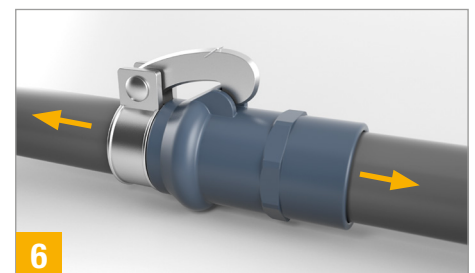

6. The fixing clamp provides additional mechanical strength complementing the sealing performance of the rubber ring.