




Electrofusion fittings/Welding fittings

Transition adapter, male threaded

ITEM 167



REFERENCE	DESCRIPTION	Net weight	Volumen (m ³)	contenido.peso bruto	Unidades lote
1019201	TRANSITION ADAPTER,M. THREAD 20-1/2"	0.217	0.01553	11.09	50
1019202	TRANSITION ADAPTER,M. THREAD 25-3/4"	0.114	0.02244	6.18	50
1019203	TRANSITION ADAPTER,M. THREAD 32-1"	0.179	0.02244	9.46	50
1019204	TRANSITION ADAPTER,M. THREAD 40-1 1/4"	0.267	0.01553	8.34	30
1019205	TRANSITION ADAPTER,M. THREAD 50-1 1/2"	0.363	0.01553	7.60	20
1019206	TRANSITION ADAPTER,M. THREAD 63-2"	0.699	0.02244	7.48	10
1019207	TRANSITION ADAPTER,M. THREAD 75-2 1/2"	0.823	0.00473	0.94	1
1019208	TRANSITION ADAPTER,M. THREAD 90-3"	1.128	0.00473	1.25	1
1019209	TRANSITION ADAPTER,M. THREAD 110-4"	2.043	0.00892	2.23	1

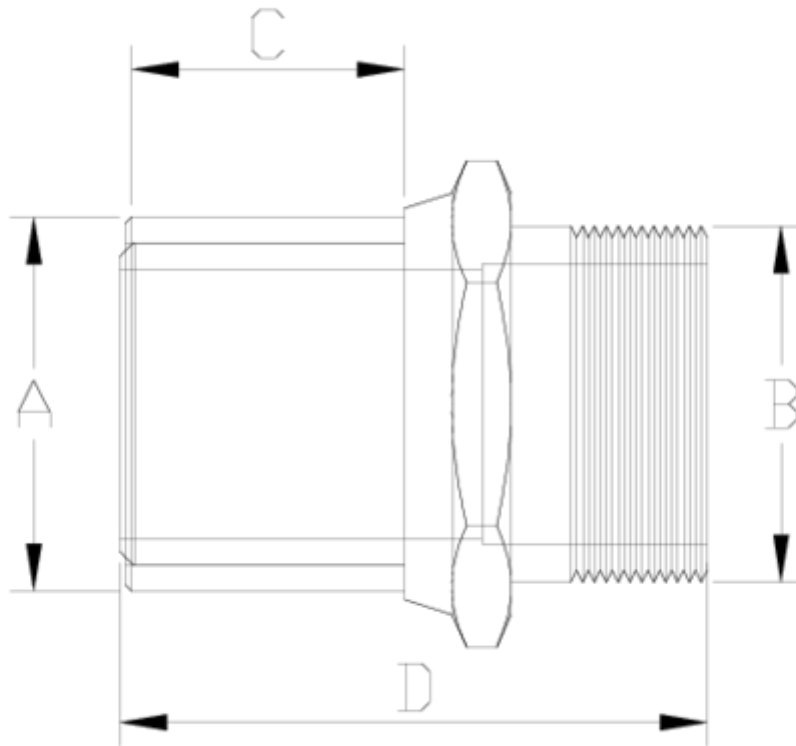


ITEM 167 | Transition adapter, male threaded

Código	f tubo-A-B	Peso (g)	C	D	PN	TIPO ROSCA
19201	20-1/2"	151	33	75	PN16	BSP
19202	25-3/4"	195	33	76	PN16	BSP
19203	32-1"	273	35	80	PN16	BSP
19204	40-1 1/4"	425	39	86	PN16	BSP
19205	50-1 1/2"	528	43	90	PN16	BSP
19206	63-2"	792	47	98	PN16	BSP
19207	75-2 1/2"	1105	59	120	PN16	BSP
19208	90-3"	1591	71	142	PN16	BSP
19209	110-4"	1965	76	148	PN16	BSP



Product Documents

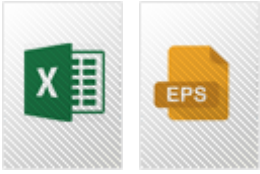

Product Certificates

Company Certificates

