




'Basic' ball valves

Fittings/female threaded outlet - PE - Basic System ITEM 215



| REFERENCE | DESCRIPTION | Net weight | Volumen (m ³) | Gross weight | Unidades lote |
|-----------|--|------------|---------------------------|--------------|---------------|
| 1011119 | BALL VALVE,FEMALE THREAD/FITTING 20-1/2" | 0,195058 | 0,02244 | 8,29 | 40 |
| 1011120 | BALL VALVE, FEMALE THREAD/FITTING 25-3/4" | 0,265 | 0,03129 | 11,17 | 40 |
| 1011121 | BALL VALVE, FEMALE THREAD/FITTING 32-1" | 0,438567 | 0,04717 | 13,7988 | 30 |
| 1011122 | BALL VALVE,FEMALE THREAD/FITTING 40-1 1/4" | 0,793 | 0,04836 | 16,43 | 20 |
| 1011123 | BALL VALVE,FEMALE THREAD/FITTING 50-1 1/2" | 1,086387 | 0,04460 | 16,845 | 15 |
| 1011124 | BALL VALVE,FEMALE THREAD/FITTING 63-2" | 1,57882 | 0,04717 | 16,43 | 10 |
| 1011125 | BALL VALVE,FEMALE THREAD/FITTING 75-2 1/2" | 1,96 | 0,04717 | 8,6 | 4 |
| 1011126 | BALL VALVE,FEMALE THREAD/FITTING 90-3" | 5,658 | 0,03648 | 11,91 | 2 |
| 1011127 | BALL VALVE,FEMALE THREAD/FITTING 110-4" | 6,672 | 0,03648 | 7,472 | 1 |

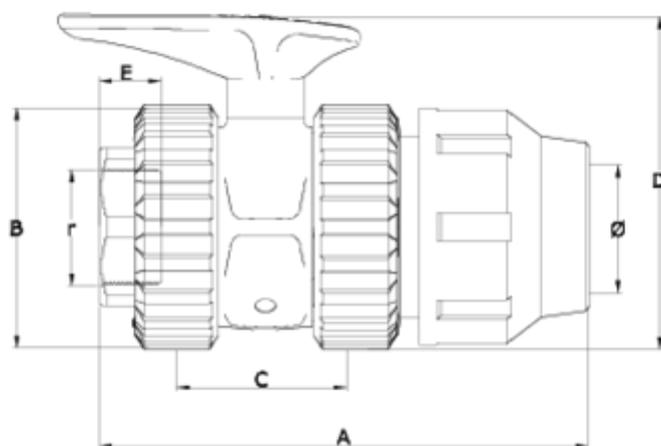


ITEM 215 | Fittings/female threaded outlet - PE - Basic System

| CÓDIGO | f -r | PESO (g) | DN | A | B | C | D | E | PN | TIPO ROSCA |
|--------|-----------|----------|-----|-----|-----|-----|-----|----|------|------------|
| 11119 | 20-1/2" | 195 | 15 | 147 | 52 | 47 | 78 | 17 | PN16 | BSP |
| 11120 | 25-3/4" | 265 | 20 | 154 | 59 | 51 | 84 | 20 | PN16 | BSP |
| 11121 | 32-1" | 438 | 25 | 183 | 70 | 66 | 97 | 23 | PN16 | BSP |
| 11122 | 40-1 1/4" | 793 | 32 | 203 | 84 | 72 | 128 | 26 | PN16 | BSP |
| 11123 | 50-1 1/2" | 1086 | 40 | 230 | 99 | 77 | 142 | 33 | PN16 | BSP |
| 11124 | 63-2" | 1578 | 50 | 270 | 121 | 90 | 165 | 29 | PN16 | BSP |
| 11125 | 75-2 1/2" | 1960 | 65 | 323 | 151 | 121 | 222 | 33 | PN10 | BSP |
| 11126 | 90-3" | 5193 | 80 | 378 | 175 | 141 | 244 | 36 | PN10 | BSP |
| 11127 | 110-4" | 6672 | 100 | 446 | 210 | 155 | 307 | 42 | PN10 | BSP |



Product Documents



Product Certificates

Company Certificates

