




'Basic' ball valves

Fittings/female threaded outlet - PTFE - Basic System ITEM 218



REFERENCE	DESCRIPTION	Net weight	Volumen (m ³)	contenido.peso bruto	Unidades lote
1011400	VALV ENL R/FIT. 20-1/2" PTFE	0.178	0.02244	7.66	40
1011401	VALV ENL R/FIT. 25-3/4" PTFE	0.265	0.03129	11.17	40
1011402	VALV ENL R/FIT. 32-1" PTFE	0.410	0.03682	12.86	30
1011403	VALV ENL R/FIT. 40-1 1/4" PTFE	0.793	0.03129	16.43	20
1011404	VALV ENL R/FIT. 50- 1 1/2" PTFE	0.984	0.03682	15.38	15
1011405	VALV ENL R/FIT. 63-2" PTFE	1.601	0.04717	16.77	10
1011406	VALV ENL R/FIT. 75-2 1/2" PTFE	1.900	0.04717	8.36	4
1011407	VALV ENL R/FIT. 90-3" PTFE	5.688	0.03648	11.97	2
1011408	VALV ENL R/FIT. 110-4" PTFE	6.672	0.03648	7.37	1



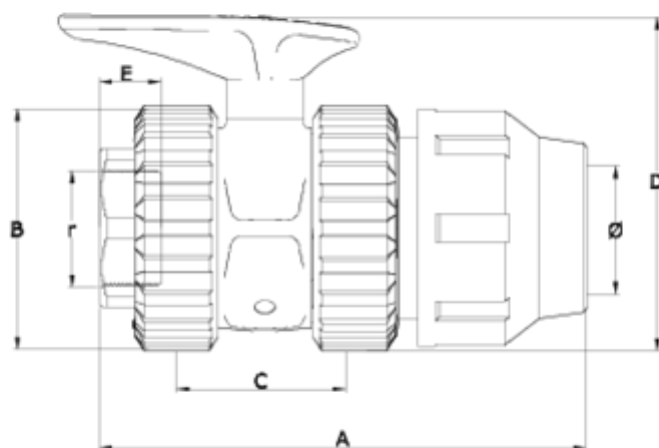

ITEM 218 | Fittings/female threaded outlet - PTFE - Basic System

C??DIGO	f -r	PESO (g)	DN	A	B	C	D	E	PN	TIPO ROSCA
11400	20-1/2"	178	15	147	52	47	78	17	PN16	BSP
11401	25-3/4"	265	20	154	59	51	84	20	PN16	BSP
11402	32-1"	410	25	183	70	66	97	23	PN16	BSP
11403	40-1 1/4"	793	32	203	84	72	128	26	PN16	BSP
11404	50-1 1/2"	984	40	230	99	77	142	33	PN16	BSP
11405	63-2"	1601	50	270	121	90	165	29	PN16	BSP
11406	75-2 1/2"	1900	65	323	151	121	222	33	PN10	BSP
11407	90-3"	5688	80	378	175	141	244	36	PN10	BSP
11408	110-4"	6672	100	446	210	155	307	42	PN10	BSP





Product Documents



Product Certificates

Company Certificates



Pol. Ind. Plá Vallonga,
c/ Agua, 28
03006 ALICANTE (España)



+34 965 11 42 82



+34 965 11 48 62



tecnicocomercial@hidroten.es



Technical &
Commercial Service
+ 34 966 105 888



www.hidroten.es