




'Basic' ball valves

Fittings/fittings outlet - Viton - Basic System ITEM 224

REFERENCE	DESCRIPTION	Net weight	Volumen (m ³)	contenido.peso bruto	Unidades lote
1011510	VALV. E.S/FIT. VITON 20-20	0.224	0.02244	9.50	40
1011511	VALV. E.S/FIT. VITON 25-25	0.285	0.03682	12.02	40
1011512	VALV. E.S/FIT. VITON 32-32	0.490	0.04717	15.46	30
1011513	VALV. E.S/FIT. VITON 40-40	0.977	0.03682	16.30	16
1011514	VALV. E.S/FIT. VITON 50-50	1.308	0.04880	20.20	15
1011515	VALV. E.S/FIT. VITON 63-63	1.851	0.06347	19.35	10
1011516	VALV. E.S/FIT. VITON 75-75	4.126	0.04836	17.17	4
1011517	VALV. E.S/FIT. VITON 90-90	6.803	0.03648	14.20	2
1011518	VALV. E.S/FIT. VITON 110-110	9.860	0.03648	10.45	1



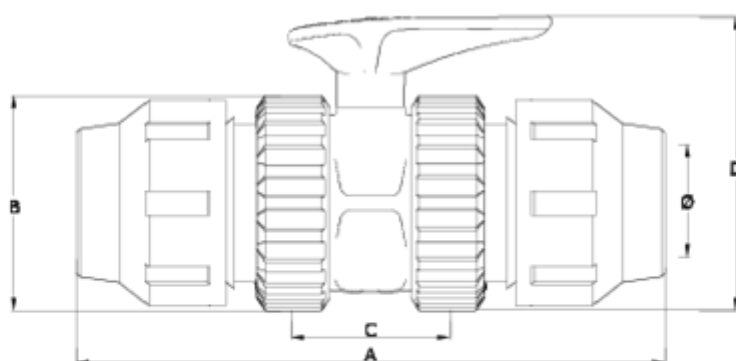

ITEM 224 | Fittings/fittings outlet - Viton - Basic System

CÓDIGO	f	PESO (g)	DN	A	B	C	D	PN	MEDIDA
11510	20	224	15	203	52	47	78	PN16	MÉTRICO
11511	25	285	20	207	59	51	84	PN16	MÉTRICO
11512	32	490	25	246	70	66	97	PN16	MÉTRICO
11513	40	977	32	272	84	72	128	PN16	MÉTRICO
11514	50	1308	40	307	99	77	142	PN16	MÉTRICO
11515	63	1851	50	378	121	90	165	PN16	MÉTRICO
11516	75	4126	65	441	151	121	222	PN10	MÉTRICO
11517	90	5955	80	521	175	141	244	PN10	MÉTRICO
11518	110	9860	100	625	210	155	307	PN10	MÉTRICO





Product Documents



Product Certificates

Company Certificates



Pol. Ind. Plá Vallonga,
c/ Agua, 28
03006 ALICANTE (España)



+34 965 11 42 82



+34 965 11 48 62



tecnicocomercial@hidroten.es



Technical &
Commercial Service
+ 34 966 105 888



www.hidroten.es