




'Basic' ball valves

Thermofusion outlet - PTFE - Basic System ITEM 494



REFERENCE	DESCRIPTION	Net weight	Volumen (m ³)	contenido.peso bruto	Unidades lote
1011450	V. ENLACE S/TERMO PTFE 20	0.155	0.01553	6.44	40
1011451	V. ENLACE S/TERMO PTFE 25	0.194	0.03129	8.30	40
1011452	V. ENLACE S/TERMO PTFE 32	0.382	0.03682	12.01	30
1011453	V. ENLACE S/TERMO PTFE 40	0.538	0.03648	11.32	20
1011454	V. ENLACE S/TERMO PTFE 50	0.782	0.03129	12.29	15
1011455	V. ENLACE S/TERMO PTFE 63	1.218	0.06149	13.10	10
1011456	V. ENLACE S/TERMO PTFE 75	2.640	0.04717	11.12	4
1011457	V. ENLACE S/TERMO PTFE 90	4.210	0.04717	9.06	2
1011458	V. ENLACE S/TERMO PTFE 110	6.528	0.04460	13.79	2



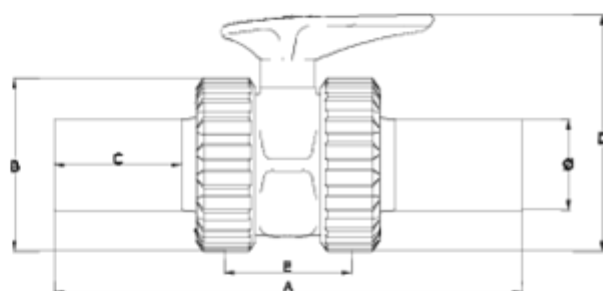


ITEM 494 | Thermofusion outlet - PTFE - Basic System

CÓDIGO	Ø	PESO (g)	DN	A	B	C	D	E	PN	MEDIDA
11450	20	155	15	215	52	65	78	47	PN16	MÉTRICO
11451	25	194	20	222	59	62	84	51	PN16	MÉTRICO
11452	32	312	25	221	70	45	97	66	PN16	MÉTRICO
11453	40	538	32	260	84	63	128	72	PN16	MÉTRICO
11454	50	782	40	287	99	79	142	77	PN16	MÉTRICO
11455	63	1218	50	328	121	89	165	90	PN16	MÉTRICO
11456	75	2640	65	366	151	95	222	121	PN10	MÉTRICO
11457	90	4210	80	397	175	97	244	141	PN10	MÉTRICO
11458	110	6527	100	435	210	102	307	155	PN10	MÉTRICO





Product Documents



Product Certificates

Company Certificates



Pol. Ind. Plá Vallonga,
c/ Agua, 28
03006 ALICANTE (España)



+34 965 11 42 82



+34 965 11 48 62



tecnicocomercial@hidroten.es



Technical &
Commercial Service
+ 34 966 105 888



www.hidroten.es