'Basic' ball valves

Female threaded outlet - Single acting spring return actuator - PTFE

ITEM 254




REFERENCE	DESCRIPTION	Net weight	Volumen (m^3)	Gross weight	Unidades lote
1011219	BALL V. S/ACTING,NEUM. ACT,F.THR. 1/2"	2,354	0,01553	2,6807	1
1011220	BALL V. S/ACTING,NEUM. ACT,F.THR. 3/4"	2,394	0,02244	2,934	1
1011221	BALL V. S/ACTING,NEUM. ACT,F.THR. 1"	2,515	0,03129	3,075	1
1011222	BALL V. S/ACTING,NEUM. ACT,F.THR. 1 1/4"	2,74	0,03129	3,3	1
1011223	BALL V. S/ACTING, PNEUM. ACT.F/THR. 1 1/2"	3,016	0,03129	3,576	1
1011224	BALL V. S/ACTING,NEUM. ACT,F.THR. 2"	4,204	0,03648	4,904	1
1011225	BALL V. S/ACTING,NEUM. ACT,F.THR. 2 1/2"	6,039	0,04460	6,879	1
1011226	BALL V. S/ACTING,NEUM. ACT,F.THR. 3"	7,735	0,04460	8,575	1
1011227	BALL V. S/ACTING,NEUM. ACT,F.THR. 4"	8,774	0,04460	9,614	1

Pol. Ind. Plá Vallonga,
c/ Agua, 28
03006 ALICANTE (España)

+34 965 11 42 82
+34 965 11 48 62
tecnicocomercial@hidroten.es

Technical &
Commercial Service
+ 34 966 105 888

www.hidroten.es

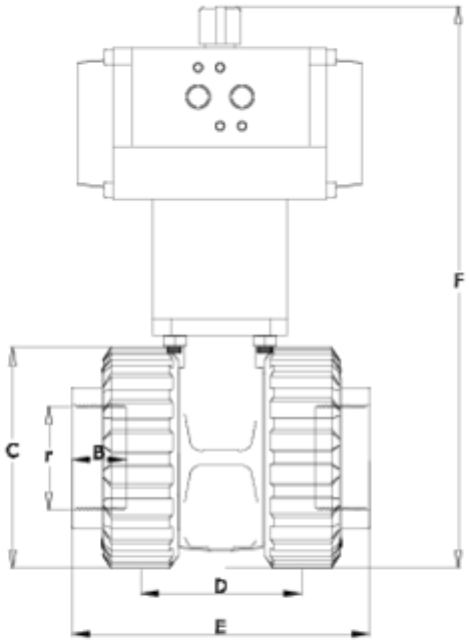

ITEM 254 | Female threaded outlet - Single acting spring return actuator - PTFE

CÓDIGO	r	PESO (g)	DN	Actuador	B	C	D	E	F	G	PN	TIPO ROSCA
11219	1/2"	2354	15	H050SE	17	52	47	91	211	138	**PN16**	BSP
11220	3/4"	2394	20	H050SE	20	59	51	101	219	138	**PN16**	BSP
11221	1"	2515	25	H050SE	23	70	66	120	230	138	**PN16**	BSP
11222	1 1/4"	2740	32	H063SE	26	84	72	134	249	156	**PN16**	BSP
11223	1 1/2"	3016	40	H063SE	33	99	77	153	267	156	**PN16**	BSP
11224	2"	4204	50	H063SE	29	121	90	161	352	156	**PN16**	BSP
11225	2 1/2"	6039	65	H075SE	33	151	121	204	426	210	**PN10**	BSP
11226	3"	7735	80	H100SE	36	175	141	234	450	281	**PN10**	BSP
11227	4"	8774	100	H100SE	42	210	155	267	477	281	**PN10**	BSP

Pol. Ind. Plá Vallonga,
c/ Agua, 28
03006 ALICANTE (España)

+34 965 11 42 82
+34 965 11 48 62
tecnicocomercial@hidroten.es

Technical &
Commercial Service
+ 34 966 105 888

www.hidroten.es

Product Documents

Product Certificates



Company Certificates













Pol. Ind. Plá Vallonga,
c/ Agua, 28
03006 ALICANTE (España)

+34 965 11 42 82
+34 965 11 48 62
tecnicocomercial@hidroten.es

Technical &
Commercial Service
+ 34 966 105 888

www.hidroten.es