





GRPP hinged sleeve

Reinforced threaded outlet

ITEM 145

REFERENCE	DESCRIPTION	Net weight	Volumen (m ³)	Gross weight	Unidades lote
1005600	160-400, PVC FEMALE THR. OUTLET 1/2"	0.565275	0.01553	7.11	12
1005601	160-400, PVC FEMALE THR. OUTLET 3/4"	0.526	0.01553	7.045	12
1005602	160-400, PVC FEMALE THR. OUTLET 1"	0.553608	0.01553	6.97	12
1005603	160-400, PVC FEMALE THR. OUTLET 1 1/4"	0.487	0.031294	6.404	12
1005604	160-400, PVC FEMALE THR. OUTLET 1 1/2"	0.505692	0.01553	6.395	12
1005605	160-400, PVC FEMALE THR. OUTLET 2"	0.5435	0.02243	7.095	12
1005606	160-400, PVC FEMALE THR. OUTLET 2 1/2"	0.546	0.031294	7.125	12
1005607	160-400, PVC FEMALE THR. OUTLET 3"	0.608	0.02243	7.78	12
1005608	160-400, PVC FEMALE THR. OUTLET 4"	0.65725	0.031294	8.46	12

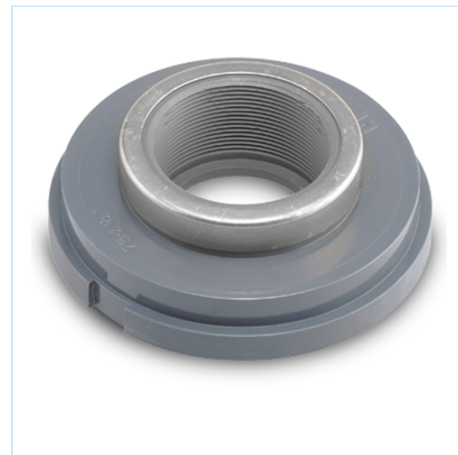

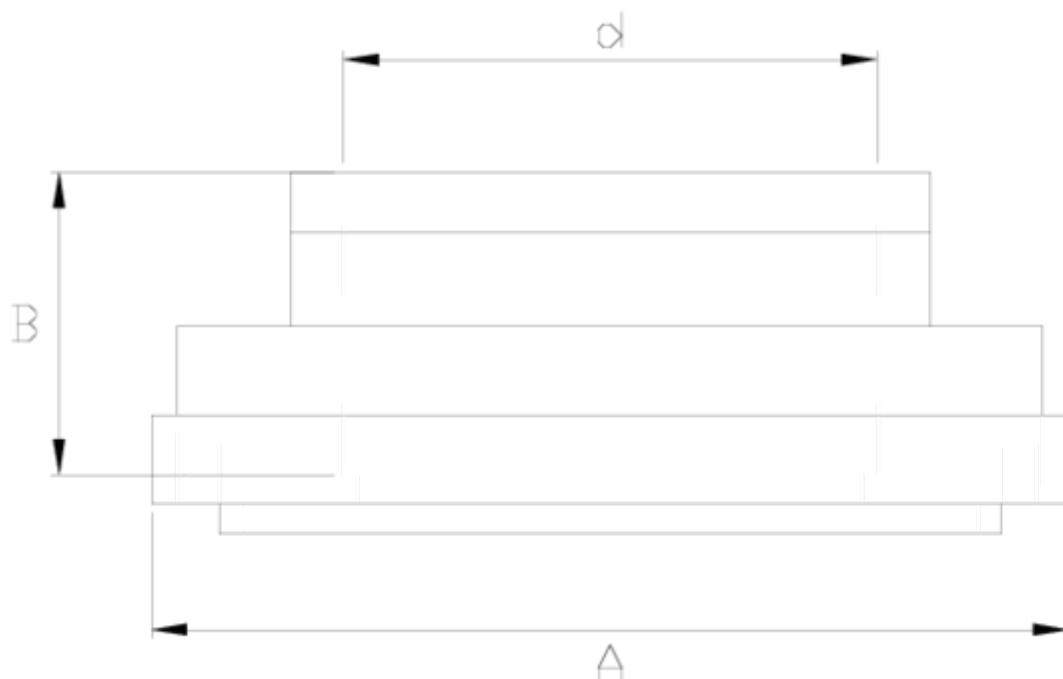

ITEM 145 | Reinforced theaded outlet

C??DIGO	d	f tubo	PESOS	A	B	PN	TIPO ROSCA
05600	1/2"	160-200-225-250-315-400	546	160	16	PN6	BSP
05601	3/4"	160-200-225-250-315-400	526	160	19	PN6	BSP
05602	1"	160-200-225-250-315-400	506	160	22	PN6	BSP
05603	1 1/4"	160-200-225-250-315-400	487	160	26	PN6	BSP
05604	1 1/2"	160-200-225-250-315-400	467	160	31	PN6	BSP
05605	2"	160-200-225-250-315-400	530	160	38	PN6	BSP
05606	2 1/2"	160-200-225-250-315-400	566	160	44	PN6	BSP
05607	3"	160-200-225-250-315-400	561	160	51	PN6	BSP
05608	4"	160-200-225-250-315-400	668	160	61	PN6	BSP





Product Documents



Product Certificates

Company Certificates



Pol. Ind. Plá Vallonga,
c/ Agua, 28
03006 ALICANTE (España)



+34 965 11 42 82



+34 965 11 48 62



tecnicocomercial@hidroten.es



Technical &
Commercial Service
+ 34 966 105 888



www.hidroten.es