



PVC check valves (with spring)

Plain/threaded outlet - Viton seal ITEM 270



REFERENCE	DESCRIPTION	Net weight	Volumen (m ³)	contenido.peso bruto	Unidades lote
1016521	V ANTI ENL VITON S/M 1/2 "- 20	0.135	0.01553	5.64	40
1016522	V ANTI ENL VITON S/M 3/4"-25	0.177	0.01553	7.32	40
1016523	V ANTI ENL VITON S/M 1"-32	0.289	0.02244	9.21	30
1016524	V ANTI ENL VITON S/M 1 1/4 "- 40	0.484	0.02244	10.22	20
1016525	V ANTI ENL VITON S/M 1 1/2 "- 50	0.700	0.03129	8.96	12
1016526	V ANTI ENL VITON S/M 2 "- 63	1.135	0.03129	11.91	10
1016527	V ANTI ENL VITON S/M 2 1/2 "- 75	2.207	0.03129	9.39	4
1016528	V ANTI ENL VITON S/M 3 "- 90	3.661	0.03129	7.88	2



Pol. Ind. Plá Vallonga,
c/ Agua, 28
03006 ALICANTE (España)



+34 965 11 42 82



+34 965 11 48 62




tecnicocomercial@hidroten.es



Technical &
Commercial Service
+ 34 966 105 888



www.hidroten.es

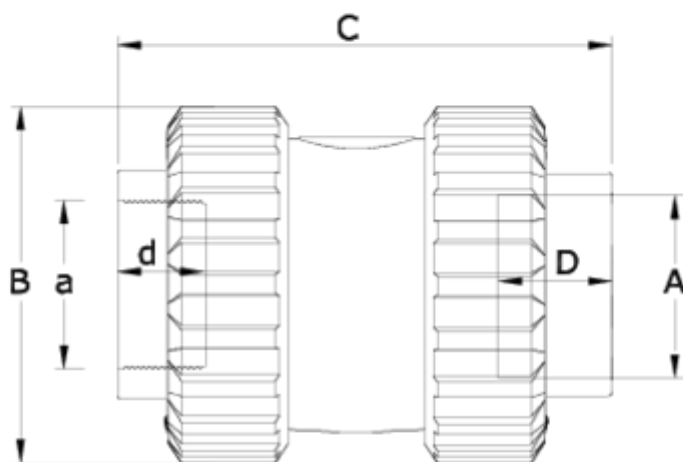

ITEM 270 | Plain/threaded outlet - Viton seal

Código Viton	A	a	Peso	B	C	D	d	PN	TIPO ROSCA
16521	20	1/2"	135	52	88	17	16	PN16	BSP
16522	25	3/4"	177	59	97	19	17	PN16	BSP
16522	32	1"	289	69	121	24	21	PN16	BSP
16522	40	1 1/4"	484	85	134	26	23	PN16	BSP
16522	50	1 1/2"	696	99	153	31	31	PN16	BSP
16522	63	2"	1111	116	169	38	38	PN16	BSP
16522	75	2 1/2"	2649	150	211	44	44	PN10	BSP
16522	90	3"	4258	178	246	51	52	PN10	BSP





Product Documents



Product Certificates

Company Certificates



Pol. Ind. Plá Vallonga,
c/ Agua, 28
03006 ALICANTE (España)



+34 965 11 42 82



+34 965 11 48 62



tecnicocomercial@hidroten.es



Technical &
Commercial Service
+ 34 966 105 888



www.hidroten.es