



PVC check valves (with spring)

Thermofusion outlet - Viton seal

ITEM 508

REFERENCE	DESCRIPTION	Net weight	Volumen (m ³)	contenido.peso bruto	Unidades lote
1016541	V ANTIRET ENL S/TERMO VITON 20	0.140	0.01553	5.84	40
1016542	V ANTIRET ENL S/TERMO VITON 25	0.167	0.01553	6.92	40
1016543	V ANTIRET ENL S/TERMO VITON 32	0.291	0.02244	9.27	30
1016544	V ANTIRET ENL S/TERMO VITON 40	0.443	0.02244	9.40	20
1016545	V ANTIRET ENL S/TERMO VITON 50	0.660	0.02244	8.46	12
1016546	V ANTIRET ENL S/TERMO VITON 63	1.105	0.04717	11.61	10
1016547	V ANTIRET ENL S/TERMO VITON 75	2.210	0.03129	9.46	4
1016548	V ANTIRET ENL S/TERMO VITON 90	3.610	0.02244	7.76	2



Pol. Ind. Plá Vallonga,
c/ Agua, 28
03006 ALICANTE (España)



+34 965 11 42 82



+34 965 11 48 62




tecnicocomercial@hidroten.es



Technical &
Commercial Service
+ 34 966 105 888



www.hidroten.es

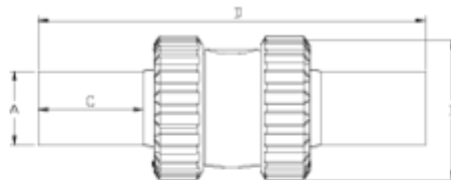

ITEM 508 | Thermofusion outlet - Viton seal

Código Vitón	A	Peso	B	C	D	PN	MEDIDA
16541	20	148	52	62	218	PN16	MÉTRICO
16542	25	190	59	62	220	PN16	MÉTRICO
16543	32	301	69	46	220	PN16	MÉTRICO
16544	40	493	85	64	259	PN16	MÉTRICO
16545	50	711	99	79	287	PN16	MÉTRICO
16546	63	1169	116	89	274	PN16	MÉTRICO
16547	75	2683	150	91	322	PN10	MÉTRICO
16548	90	4323	178	100	383	PN10	MÉTRICO





Product Documents



Product Certificates

Company Certificates



Pol. Ind. Plá Vallonga,
c/ Agua, 28
03006 ALICANTE (España)



+34 965 11 42 82



+34 965 11 48 62



tecnicocomercial@hidroten.es



Technical &
Commercial Service
+ 34 966 105 888



www.hidroten.es