




PP compression fittings

Reinforced 90° elbow, female threaded ITEM 483



REFERÊNCIA	DESCRIÇÃO	Peso líquido	Volume (m³)	contenido.peso bruto	Unidades por lote
112E129	90° ELBOW, FEMALE THREAD REINF 20X1/2"	0.066	0.02243	5.73	80
112E130	90° ELBOW, FEMALE THREAD REINF 25X3/4"	0.095	0.03129	8.16	80
112E131	90° ELBOW, FEMALE THREAD REINF 32x1"	0.128	0.03129	8.88	65
112E132	90° ELBOW, FEMALE THREAD REINF 40 x 1 1/4"	0.235	0.03682	10.02	40
112E133	90° ELBOW, FEMALE THREAD REINF 50 x 1 1/2"	0.348	0.06347	14.68	40
112E134	90° ELBOW, FEMALE THREAD REINF 63 x 2"	0.596	0.06347	15.20	24
112E135	90° ELBOW, FEMALE THREAD REINF 75 x 2 1/2"	0.992	0.04460	10.75	10
112E136	90° ELBOW, FEMALE THREAD REINF 90 x 3"	1.740	0.03129	9.26	5
112E137	90° ELBOW, FEMALE THREAD REINF 110 x 4"	2.423	0.02244	5.39	2
112E384	90° ELBOW, FEMALE THREAD REINF 32x3/4"	0.000	0.03129	0.00	65



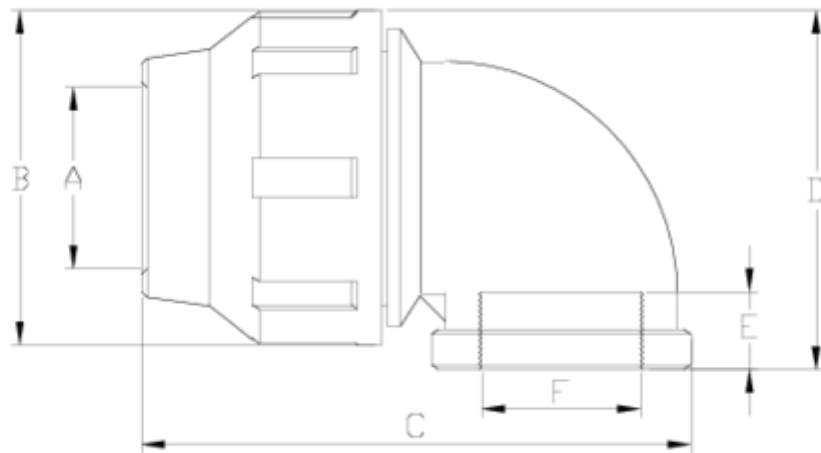

ITEM 483 | Reinforced 90° elbow, female threaded

Código	f tubo - F	Peso (g)	A	B	C	D	E	PN	TIPO ROSCA
12E129	20 - 1/2"	64	21	46	87	57	20	PN16	BSP
12E130	25 - 3/4"	89	26	55	97	65	20	PN16	BSP
12E384	32 - 3/4"	132	33	64	111	76	20	PN16	BSP
12E131	32 - 1"	128	33	64	111	76	22	PN16	BSP
12E132	40 - 1 1/4"	235	42	76	138	91	25	PN16	BSP
12E133	50 - 1 1/2"	348	51	91	153	106	25	PN16	BSP
12E134	63 - 2"	596	64	109	189	120	29	PN16	BSP
12E135	75 - 2 1/2"	992	77	133	220	142	34	PN10	BSP
12E136	90 - 3"	1740	92	159	267	165	42	PN10	BSP
12E137	110 - 4"	2423	112	183	303	201	51	PN10	BSP





ITEM 483 | Reinforced 90° elbow, female threaded





Documentação do Produto



Certificados do Produto

Certificados da Empresa

