




PP compression fittings

Reinforced straight union, female threaded ITEM 478



REFERÊNCIA	DESCRIÇÃO	Peso líquido	Volume (m ³)	contenido.peso bruto	Unidades por lote
112E112	COUPLING FEMALE THREAD, REINF. 25 x 1/2"	0.090	0.03129	9.57	100
112E114	COUPLING FEMALE THREAD, REINF. 32 x 3/4"	0.130	0.04460	13.73	100
112E138	COUPLING FEMALE THREAD, REINF. 20 x 1/2"	0.063	0.02244	6.84	100
112E139	COUPLING FEMALE THREAD, REINF. 25 x 3/4"	0.087	0.03129	9.24	100
112E140	COUPLING FEMALE THREAD, REINF. 32 x 1"	0.130	0.04460	13.83	100
112E141	COUPLING FEMALE THREAD, REINF. 40 x 1 1/4"	0.218	0.04460	13.04	56
112E142	COUPLING FEMALE THREAD, REINF. 50 x 1 1/2"	0.346	0.04460	14.54	40
112E143	COUPLING FEMALE THREAD, REINF. 63 x 2"	0.520	0.06150	15.54	28
112E144	COUPLING FEMALE THREAD, REINF. 75 x 2 1/2"	0.930	0.03682	9.85	10
112E145	COUPLING FEMALE THREAD, REINF. 90 x 3"	1.740	0.03682	9.25	5
112E146	COUPLING FEMALE THREAD, REINF. 110 x 4"	2.064	0.02244	4.67	2



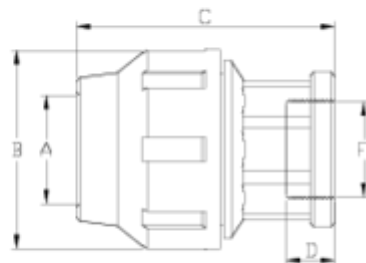

ITEM 478 | Reinforced straight union, female threaded

Código	f tubo - F	Peso (g)	A	B	C	D	PN	TIPO ROSCA
12E138	20 - 1/2"	63	21	46	76	18	PN16	BSP
12E112	25 - 1/2"	93	26	55	83	18	PN16	BSP
12E139	25 - 3/4"	90	26	55	84	21	PN16	BSP
12E114	32 - 3/4"	135	33	63	92	21	PN16	BSP
12E140	32 - 1"	130	33	63	93	23	PN16	BSP
12E141	40 - 1 1/4"	218	42	76	112	25	PN16	BSP
12E142	50 - 1 1/2"	314	51	91	119	25	PN16	BSP
12E143	63 - 2"	550	64	109	141	29	PN16	BSP
12E144	75 - 2 1/2"	902	77	133	169	34	PN10	BSP
12E145	90 - 3"	1494	92	159	204	38	PN10	BSP





ITEM 478 | Reinforced straight union, female threaded

12E146	110 - 4"	2064	112	183	231	50	PN10	BSP
--------	----------	------	-----	-----	-----	----	-------------	-----





Documentação do Produto



Certificados do Produto

Certificados da Empresa

