




PP compression fittings

Straight union, female threaded ITEM 477


REFERÊNCIA	DESCRIÇÃO	Peso líquido	Volume (m³)	contenido.peso bruto	Unidades por lote
112E046	COUPLING, FEMALE THREAD 20 x 1/2"	0.052	0.02244	5.74	100
112E047	COUPLING, FEMALE THREAD 25 x 3/4"	0.081	0.03129	8.66	100
112E048	COUPLING, FEMALE THREAD 32 x 1"	0.121	0.04460	12.80	100
112E049	COUPLING, FEMALE THREAD 40 x 1 1/4"	0.213	0.04460	12.76	56
112E050	COUPLING, FEMALE THREAD 50 x 1 1/2"	0.312	0.04460	13.17	40
112E051	COUPLING, FEMALE THREAD 63 x 2"	0.551	0.06150	16.41	28
112E053	COUPLING, FEMALE THREAD 25 x 1/2"	0.085	0.03129	9.07	100
112E055	COUPLING, FEMALE THREAD 32 x 3/4"	0.125	0.04460	13.23	100



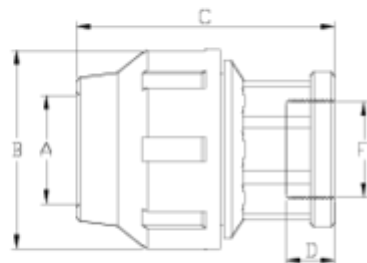

ITEM 477 | Straight union, female threaded

Código	f tubo	Peso (g)	A	B	C	D	PN	TIPO ROSCA
12E046	20 - 1/2"	54	21	46	75	18	PN16	BSP
12E053	25 - 1/2"	82	26	55	83	18	PN16	BSP
12E047	25 - 3/4"	79	26	55	83	21	PN16	BSP
12E055	32 - 3/4"	122	33	63	92	21	PN16	BSP
12E048	32 - 1"	117	33	63	92	23	PN16	BSP
12E049	40 - 1 1/4"	196	42	76	111	25	PN16	BSP
12E050	50 - 1 1/2"	289	51	91	118	25	PN16	BSP
12E051	63 - 2"	509	64	109	140	29	PN16	BSP
12E144	75 - 2 1/2"	902	77	133	169	34	PN10	BSP
12E145	90 - 3"	1494	92	159	204	38	PN10	BSP






ITEM 477 | Straight union, female threaded

12E146	110 - 4"	2064	112	183	231	50	PN10	BSP
--------	----------	------	-----	-----	-----	----	------	-----





Documentação do Produto



Certificados do Produto

Certificados da Empresa

