





GRPP hinged sleeve

Reinforced threaded outlet

ITEM 145

REFERÊNCIA	DESCRIÇÃO	Peso líquido	Volume (m³)	contenido.peso bruto	Unidades por lote
1005600	BOCA COMUN 160-200-225-250-315-400 S/R/H 1/2"	0.546	0.03129	7.11	12
1005601	BOCA COMUN 160-200-225-250-315-400 S/R/H 3/4"	0.526	0.01553	7.05	12
1005602	BOCA COMUN 160-200-225-250-315-400 S/R/H 1"	0.554	0.01553	6.97	12
1005603	BOCA COMUN 160-200-225-250-315-400 S/R/H REF 1 1/4"	0.487	0.03129	6.40	12
1005604	BOCA COMUN 160-200-225-250-315-400 S/R/H REF 1 1/2"	0.506	0.01553	6.40	12
1005605	BOCA COMUN 160-200-225-250-315-400 S/R/H REF 2"	0.544	0.02243	7.10	12
1005606	BOCA COMUN 160-200-225-250-315-400 S/R/H REF 2 1/2"	0.546	0.03129	7.13	12
1005607	BOCA COMUN 160-200-225-250-315-400 S/R/H REF 3"	0.608	0.02243	7.78	12
1005608	BOCA COMUN 160-200-225-250-315-400 S/R/H REF 4"	0.657	0.03129	8.46	12

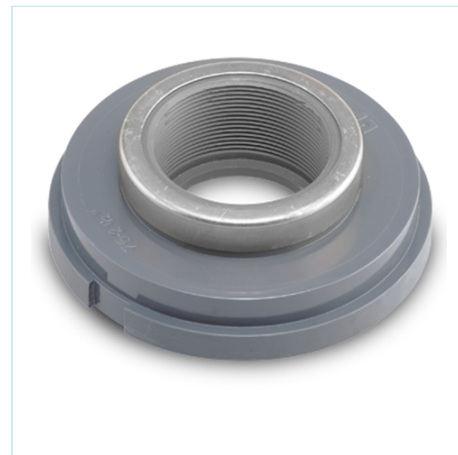

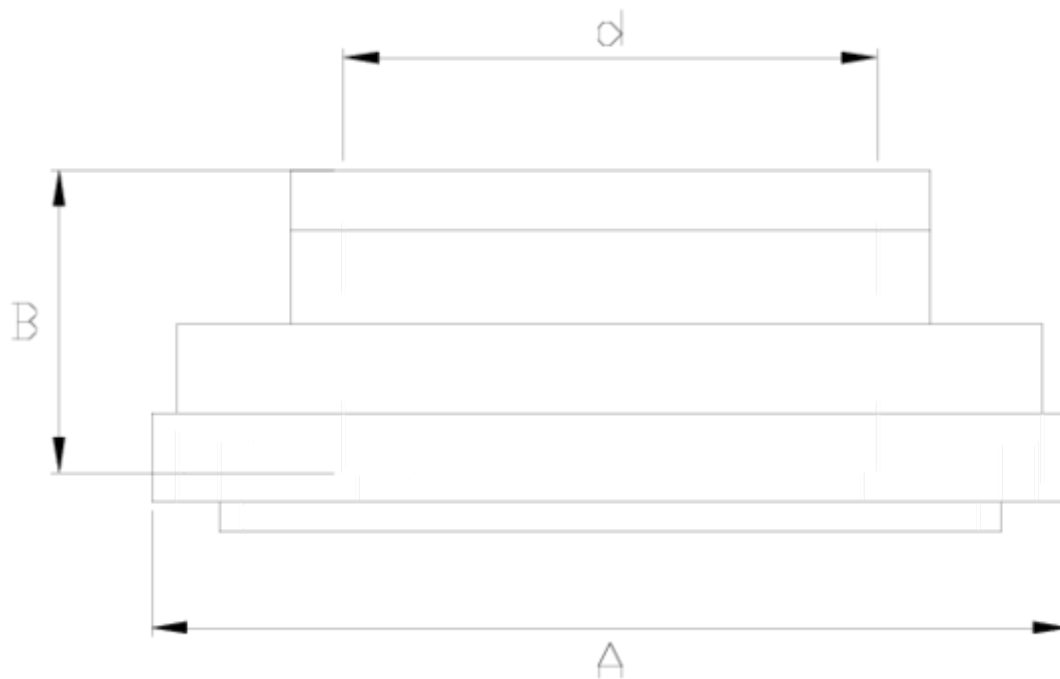

ITEM 145 | Reinforced theaded outlet

CÓDIGO	d	f tubo	PESOS	A	B	PN	TIPO ROSCA
05600	1/2"	160-200-225-250-315-400	546	160	16	PN6	BSP
05601	3/4"	160-200-225-250-315-400	526	160	19	PN6	BSP
05602	1"	160-200-225-250-315-400	506	160	22	PN6	BSP
05603	1 1/4"	160-200-225-250-315-400	487	160	26	PN6	BSP
05604	1 1/2"	160-200-225-250-315-400	467	160	31	PN6	BSP
05605	2"	160-200-225-250-315-400	530	160	38	PN6	BSP
05606	2 1/2"	160-200-225-250-315-400	566	160	44	PN6	BSP
05607	3"	160-200-225-250-315-400	561	160	51	PN6	BSP
05608	4"	160-200-225-250-315-400	668	160	61	PN6	BSP





Documentação do Produto



Certificados do Produto

Certificados da Empresa

