




Netvitc System butterfly valves

Manually operated, solvent socket outlet ITEM 175



REFERÊNCIA	DESCRIÇÃO	Peso líquido	Volume (m³)	contenido.peso bruto	Unidades por lote
109N330	VM NETVITC SYSTEM R MAN 63 C/B S/ENC	4.222	0.04460	5.05	1
109N331	VM NETVITC SYSTEM R MAN 75 C/B S/ENC	4.222	0.04460	5.05	1
109N332	VM NETVITC SYSTEM R MAN 90 C/B S/ENC	5.307	0.03129	5.88	1
109N333	VM NETVITC SYSTEM R MAN 110 C/B S/ENC	6.377	0.03129	6.95	1
109N334	VM NETVITC SYSTEM R MAN 125 C/B S/ENC	6.843	0.04460	7.67	1
109N335	VM NETVITC SYSTEM R MAN 140 C/B S/ENC	7.922	0.06150	8.90	1
109N336	VM NETVITC SYSTEM R MAN 160 C/B S/ENC	11.256	0.04460	11.95	1
109N337	VM NETVITC SYSTEM R MAN 200 C/B S/ENC	14.450	0.06347	15.28	1
109N338	VM NETVITC SYSTEM R MAN 225 C/B S/ENC	13.314	0.06150	14.29	1



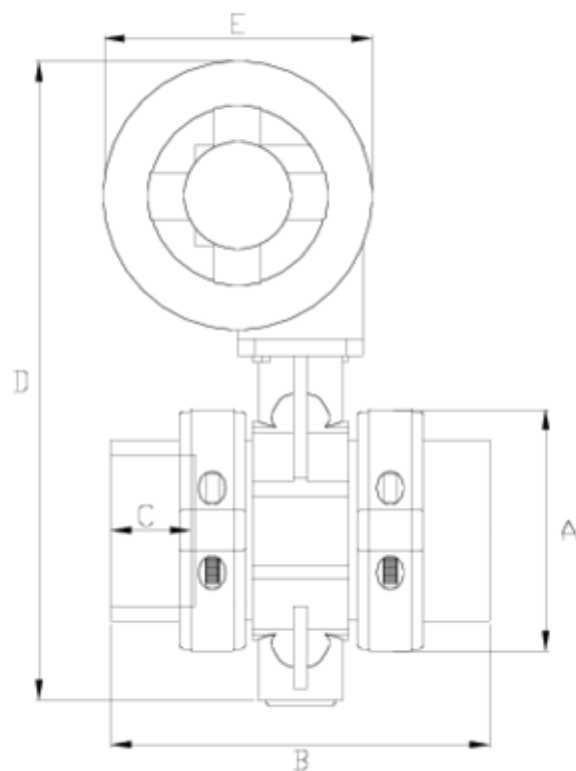

ITEM 175 | Manually operated, solvent socket outlet

CÓDIGO	f	BRIDA	Pesos	A	B	C	D	E	PN	MEDIDA
9N330	63	75	4282	138	218	42	362	172	PN10	MÉTRICO
9N331	75	75	4240	138	192	44	362	172	PN10	MÉTRICO
9N332	90	90	5086	164	235	52	386	172	PN10	MÉTRICO
9N333	110	110	5869	188	247	61	406	172	PN10	MÉTRICO
9N334	125	125	6843	203	282	70	417	172	PN10	MÉTRICO
9N335	140	140	7922	224	298	78	488	250	PN10	MÉTRICO
9N336	160	160	9661	251	315	86	510	250	PN10	MÉTRICO
9N337	200	200	12294	297	390	106	584	250	PN6	MÉTRICO
9N338	225	200	13314	297	476	120	584	250	PN6	MÉTRICO





Documentação do Produto



Certificados do Produto

Certificados da Empresa

