





## Spare parts

# PE outlet

## ITEM 642

| REFERÊNCIA | DESCRIÇÃO             | Peso líquido | Volumen (m³) | contenido.peso bruto | Unidades por lote |
|------------|-----------------------|--------------|--------------|----------------------|-------------------|
| 111D841    | SALIDA TERMOFUSIÓN 20 | 0.041        | 0.01553      | 1.56                 | 30                |
| 111D842    | SALIDA TERMOFUSIÓN 25 | 0.047        | 0.01553      | 1.64                 | 30                |
| 111D843    | SALIDA TERMOFUSIÓN 32 | 0.077        | 0.02244      | 2.54                 | 30                |
| 111D844    | SALIDA TERMOFUSIÓN 40 | 0.145        | 0.02244      | 4.58                 | 30                |
| 111D845    | SALIDA TERMOFUSIÓN 50 | 0.180        | 0.03129      | 5.44                 | 30                |
| 111D846    | SALIDA TERMOFUSIÓN 63 | 0.365        | 0.03129      | 7.88                 | 20                |
| 111D847    | SALIDA TERMOFUSIÓN 75 | 0.605        | 0.01553      | 2.75                 | 4                 |
| 111D848    | SALIDA TERMOFUSIÓN 90 | 0.900        | 0.02243      | 4.09                 | 4                 |

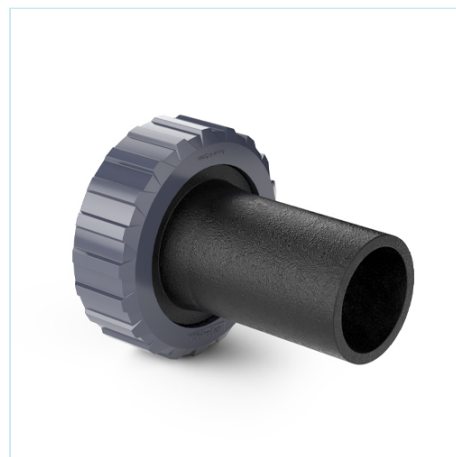

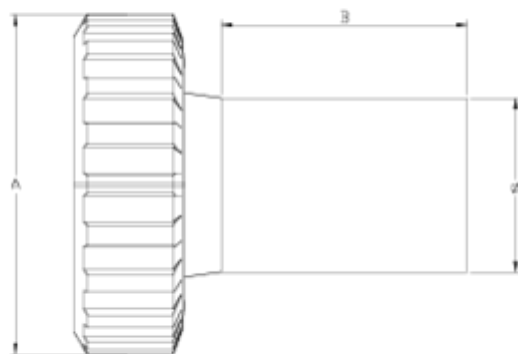

## ITEM 642 | PE outlet

| CÓDIGO | r  | PESO (g) | DN | A   | B   | PN   | MEDIDA  |
|--------|----|----------|----|-----|-----|------|---------|
| 11D841 | 20 | 67       | 15 | 55  | 65  | PN16 | MÉTRICO |
| 11D842 | 25 | 81       | 20 | 62  | 65  | PN16 | MÉTRICO |
| 11D843 | 32 | 134      | 25 | 72  | 70  | PN16 | MÉTRICO |
| 11D844 | 40 | 150      | 32 | 88  | 70  | PN16 | MÉTRICO |
| 11D845 | 50 | 230      | 40 | 103 | 79  | PN16 | MÉTRICO |
| 11D846 | 63 | 340      | 50 | 120 | 89  | PN16 | MÉTRICO |
| 11D847 | 75 | 580      | 65 | 150 | 91  | PN10 | MÉTRICO |
| 11D848 | 90 | 990      | 80 | 181 | 100 | PN10 | MÉTRICO |





## Documentação do Produto



## Certificados do Produto

## Certificados da Empresa

