




PP Compression Fittings

Enlace recto reducido

ITEM 475

REFERÊNCIA	DESCRIÇÃO	Peso líquido	Volume (m³)	contenido.peso bruto	Unidades por lote
112E083	REDUCING COUPLING 25-20	0.101	0.03129	8.64	80
112E084	REDUCING COUPLING 30-25	0.153	0.03129	8.98	55
112E085	REDUCING COUPLING 40-32	0.265	0.04880	14.01	50
112E086	REDUCING COUPLING 50-40	0.425	0.04880	13.51	30
112E087	REDUCING COUPLING 63-50	0.637	0.03648	8.34	12
112E088	REDUCING COUPLING 75-63	1.214	0.04117	11.57	9
112E089	REDUCING COUPLING 90-75	2.066	0.03129	8.82	4
112E090	REDUCING COUPLING 110-90	3.080	0.03129	6.72	2
112E270	REDUCING COUPLING 32-20	0.000	0.03682	0.00	55
112E272	REDUCING COUPLING 50-32	0.366	0.04880	11.65	30
112E273	ENLACE RECTO REDUCIDO 63-40 TUERCA GRIS	0.665	0.03648	8.57	12
112E278	REDUCING COUPLING 90-63	1.815	0.03129	7.82	4



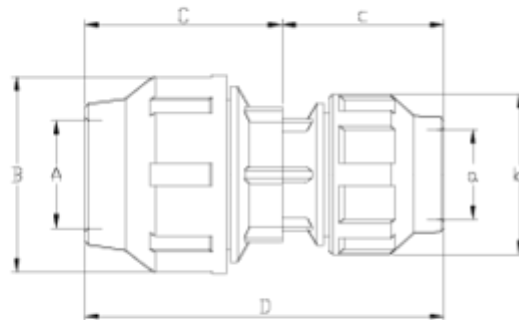

ITEM 475 | Enlace recto reducido

Código	f tubo	Peso (g)	A	a	B	b	C	c	D	PN	MEDIDA
12E083	25-20	97	26	21	55	46	60	57	=H3+I3	PN16	MÉTRICO
12E270	32-20	145	33	32	64	46	67	57	124	PN16	MÉTRICO
12E084	32-25	156	33	26	64	55	67	63	=H5+I5	PN16	MÉTRICO
12E085	40-32	252	42	33	76	64	83	76	=H6+I6	PN16	MÉTRICO
12E273	50-32	345	51	33	91	64	90	76	166	PN16	MÉTRICO
12E086	50-40	404	51	42	91	76	90	90	=H8+I8	PN16	MÉTRICO
12E273	63-40	560	64	42	109	64	106	83	189	PN16	MÉTRICO
12E087	63-50	637	64	51	109	91	106	97	=H10+I10	PN16	MÉTRICO
12E088	75-63	1104	77	64	133	109	129	114	=H11+I11	PN10	MÉTRICO
12E278	90-63	1580	92	64	159	109	162	114	=H12+I12	PN10	MÉTRICO





ITEM 475 | Enlace recto reducido

12E089	90-75	2030	92	77	159	133	162	140	=H13+I13	PN10	MÉTRICO
12E090	110-90	3080	112	92	183	159	174	164	=H14+I14	PN10	MÉTRICO





Documentação do Produto



Certificados do Produto

Certificados da Empresa

