




PP fittings for polyethylene

Reinforced female threaded straight union

ITEM 101

REFERÊNCIA	DESCRIÇÃO	Peso líquido	Volume (m³)	contenido.peso bruto	Unidades por lote
1012112	ENLACE M/H REFORZADO 25-1/2"	0.088	0.03129	9.38	100
1012114	ENLACE M/H REFORZADO 32-3/4"	0.130	0.04460	13.77	100
1012138	ENLACE M/H REFORZADO 20-1/2"	0.060	0.02244	6.46	100
1012139	ENLACE M/H REFORZADO 25-3/4"	0.087	0.03129	9.31	100
1012140	ENLACE M/H REFORZADO 32-1"	0.127	0.04460	13.43	100
1012141	ENLACE M/H REFORZADO 40-1 1/4	0.232	0.04460	13.72	56
1012142	ENLACE M/H REFORZADO 50-1 1/2	0.332	0.04460	14.02	40
1012143	ENLACE M/H REFORZADO 63-2"	0.599	0.06150	17.70	28
1012144	ENLACE M/H REFORZADO 75-2 1/2	0.928	0.03682	9.83	10
1012145	ENLACE M/H REFORZADO 90-3"	1.481	0.04460	8.10	5
1012146	ENLACE M/H REFORZADO 110-4"	2.134	0.02244	4.80	2



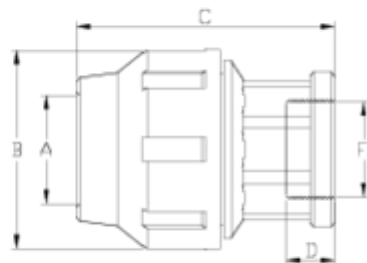

ITEM 101 | Reinforced female threaded straight union

Código	f tubo - F	Peso (g)	A	B	C	D	PN	TIPO ROSCA
12138	20 - 1/2"	63	21	46	76	18	PN16	BSP
12212	25 - 1/2"	93	26	55	83	18	PN16	BSP
12139	25 - 3/4"	90	26	55	84	21	PN16	BSP
12214	32 - 3/4"	135	33	63	92	21	PN16	BSP
12140	32 - 1"	130	33	63	93	23	PN16	BSP
12141	40 - 1 1/4"	218	42	76	112	25	PN16	BSP
12142	50 - 1 1/2"	314	51	91	119	25	PN16	BSP
12143	63 - 2"	550	64	109	141	29	PN16	BSP
12144	75 - 2 1/2"	902	77	133	169	34	PN10	BSP
12145	90 - 3"	1494	92	159	204	38	PN10	BSP





ITEM 101 | Reinforced female threaded straight union

12146	110 - 4"	2064	112	183	231	50	PN10	BSP
-------	----------	------	-----	-----	-----	----	------	-----





Documentación del Producto



Certificados del Producto



Certificados da Empresa

