




'basic' bi-directional ball valve

PTFE Male solvent socket outlet

ITEM 785

REFERÊNCIA	DESCRIÇÃO	Peso líquido	Volume (m³)	contenido.peso bruto	Unidades por lote
111D120	VÁLVULA DE BOLA BIDIRECCIONAL ENCOLAR MACHO PTFE 20	0.169	0.02244	6.53	40
111D121	VÁLVULA DE BOLA BIDIRECCIONAL ENCOLAR MACHO PTFE 25	0.215	0.02244	4.75	40
111D122	VÁLVULA DE BOLA BIDIRECCIONAL ENCOLAR MACHO PTFE 32	0.363	0.04117	7.99	30
111D123	VÁLVULA DE BOLA BIDIRECCIONAL ENCOLAR MACHO PTFE 40	0.590	0.04117	6.96	20
111D124	VÁLVULA DE BOLA BIDIRECCIONAL ENCOLAR MACHO PTFE 50	0.885	0.04880	9.60	15
111D125	VÁLVULA DE BOLA BIDIRECCIONAL ENCOLAR MACHO PTFE 63	1.498	0.04717	15.68	10



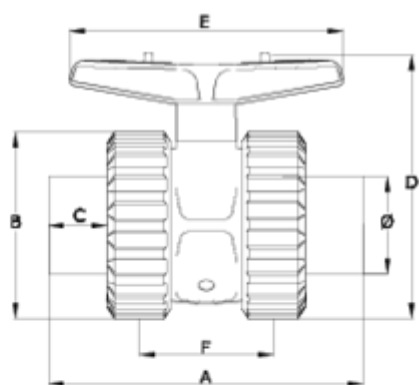

ITEM 785 | PTFE Male solvent socket outlet

CÓDIGO	f	PESO (g)	DN	A	B	C	D	E	F	PN	MEDIDA
11D120	20	158	15	104	55	16	74	80	44	PN16	MÉTRICO
11D121	25	200	20	112	62	19	80	80	49	PN16	MÉTRICO
11D122	32	332	25	142	72	23	103	101	66	PN16	MÉTRICO
11D123	40	574	32	165	88	25	125	130	71	PN16	MÉTRICO
11D124	50	838	40	180	103	31	138	130	75	PN16	MÉTRICO
11D125	63	1308	50	210	120	38	177	170	89	PN16	MÉTRICO





Documentação do Produto



Certificados do Produto

Certificados da Empresa

