





Spare parts

Reinforced female threaded outlet

ITEM 641

REFERÊNCIA	DESCRIÇÃO	Peso líquido	Volume (m³)	contenido.peso bruto	Unidades por lote
111D831	SALIDA R/H REFORZADA 1/2"	0.076	0.00892	4.75	60
111D832	SALIDA R/H REFORZADA 3/4"	0.064	0.00892	2.75	40
111D833	SALIDA R/H REFORZADA 1"	0.090	0.00892	5.59	60
111D834	SALIDA R/H REFORZADA 1 1/4"	0.148	0.00892	4.33	28
111D835	SALIDA R/H REFORZADA 1 1/2"	0.246	0.01553	7.72	30
111D836	SALIDA R/H REFORZADA 2"	0.350	0.02244	8.88	24
111D837	SALIDA R/H REFORZADA 2 1/2"	0.619	0.01553	2.80	4
111D838	SALIDA R/H REFORZADA 3"	1.022	0.01553	4.42	4

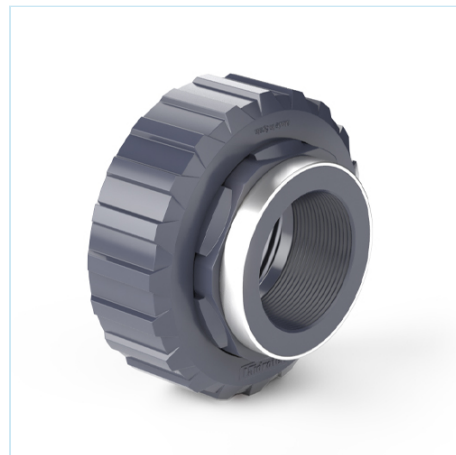

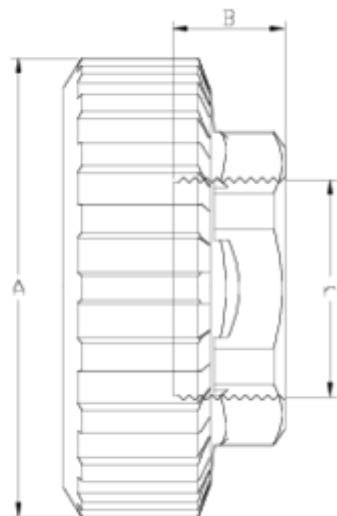

ITEM 641 | Reinforced female threaded outlet

CÓDIGO	r	PESO (g)	DN	A	B	PN	TIPO ROSCA
11D831	1/2"	49	15	55	17	PN16	BSP
11D832	3/4"	69	20	62	20	PN16	BSP
11D833	1"	93	25	72	23	PN16	BSP
11D834	1 1/4"	160	32	88	26	PN16	BSP
11D835	1 1/2"	251	40	103	33	PN16	BSP
11D836	2"	405	50	120	29	PN16	BSP
11D837	2 1/2"	620	65	150	33	PN10	BSP
11D838	3"	1115	80	181	36	PN10	BSP





Documentação do Produto



Certificados do Produto

Certificados da Empresa

