



## Válvulas de esfera "Basic" bidireccional

# Valvula de bola "Basic"


## bidireccional FPM salida termofusión atuador eléctrico

### ITEM 691



| REFERÊNCIA | DESCRIÇÃO                        | Peso líquido | Volume (m <sup>3</sup> ) | Peso bruto | Unidades por lote |
|------------|----------------------------------|--------------|--------------------------|------------|-------------------|
| 111D410    | V.B. BID.ACT.ELEC S/TERMO 20 FPM | 1,2203       | 0,03648                  | 1,8065     | 1                 |
| 111D411    | V.B. BID.ACT.ELEC S/TERMO 25 FPM | 1,2675       | 0,03648                  | 1,8537     | 1                 |
| 111D412    | V.B. BID.ACT.ELEC S/TERMO 32 FPM | 1,4555       | 0,03648                  | 2,0417     | 1                 |
| 111D413    | V.B. BID.ACT.ELEC S/TERMO 40 FPM | 2,616        | 0,03648                  | 3,2022     | 1                 |
| 111D414    | V.B. BID.ACT.ELEC S/TERMO 50 FPM | 3,944        | 0,04460                  | 4,638      | 1                 |
| 111D415    | V.B. BID.ACT.ELEC S/TERMO 63 FPM | 3,502        | 0,04460                  | 4,1678     | 1                 |
| 111D416    | V.B. BID.ACT.ELEC S/TERMO 75 FPM | 4,55         | 0,02243                  | 0          | 1                 |
| 111D417    | V.B. BID.ACT.ELEC S/TERMO 90 FPM | 6,63         | 0,06347                  | 7,46       | 1                 |



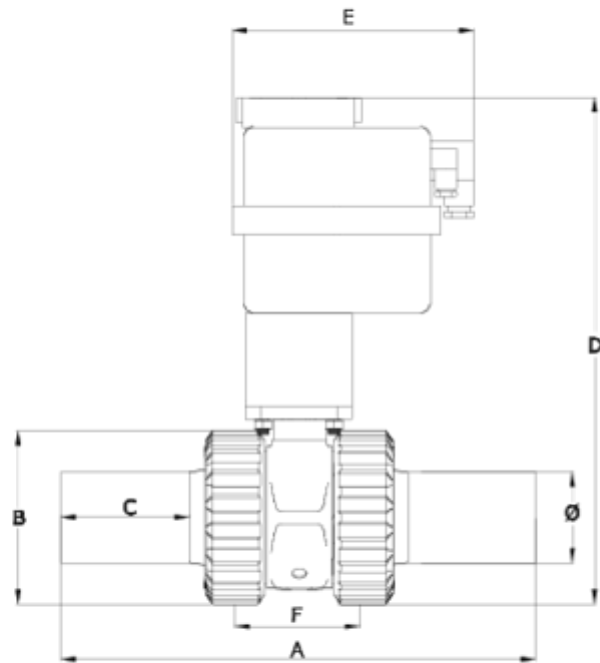

## ITEM 691 | Valvula de bola “Basic” bidireccional FPM salida termofusión atuador eléctrico

| CÓDIGO | f  | Actuador | PESO (g) | DN | A   | B   | C   | D   | E   | F   | PN   | MEDIDA  |
|--------|----|----------|----------|----|-----|-----|-----|-----|-----|-----|------|---------|
| 11D410 | 20 | H10      | 1086     | 15 | 212 | 55  | 65  | 227 | 177 | 44  | PN16 | MÉTRICO |
| 11D411 | 25 | H10      | 1128.92  | 20 | 221 | 62  | 65  | 232 | 177 | 49  | PN16 | MÉTRICO |
| 11D412 | 32 | H10      | 1258.8   | 25 | 256 | 72  | 70  | 243 | 177 | 66  | PN16 | MÉTRICO |
| 11D413 | 40 | H20      | 2118.7   | 32 | 261 | 88  | 70  | 265 | 177 | 71  | PN16 | MÉTRICO |
| 11D414 | 50 | H20      | 2375.84  | 40 | 285 | 103 | 79  | 282 | 177 | 75  | PN16 | MÉTRICO |
| 11D415 | 63 | H20      | 2839.8   | 50 | 327 | 120 | 89  | 390 | 177 | 89  | PN16 | MÉTRICO |
| 11D416 | 75 | H35      | 4550     | 65 | 369 | 150 | 91  | 401 | 177 | 119 | PN10 | MÉTRICO |
| 11D417 | 90 | H55      | 6630     | 80 | 410 | 181 | 100 | 450 | 177 | 140 | PN10 | MÉTRICO |





## Documentação do Produto



## Certificados do Produto

## Certificados da Empresa

